JV150 features-at-a-glance

- Print resolutions up to 1440 dpi
- Print speeds up to 605 sqft/hr
- Up to 8-color ink configuration including orange and light colors
- Eco-solvent inks for indoor or outdoor prints
- Dye-sub inks for textile and apparel applications
- Available in 54 and 64 inch widths

HIGH QUALITY AT HIGHER SPEEDS

MAPS3 technology reduces the appearance of banding.


MAPS3 (Mimaki Advanced Pass System 3) prints passes in a gradation-like method by dispersing ink drops between passes. This unique imaging technology reduces banding, uneven ink drying and bi-directional stripes.



Using MAPS3 technology

Superior inkjet technology provides precise, consistent high quality imaging.

Mimaki's Waveform inkjet technology controls the shape of the ink drop to an almost perfect sphere for precise placement. This results in sharper lines, text and image edges.




Smooth, high definition color with variable dot printing.

Variable dot printing produces a smoother, more natural gradation without the granular appearance seen in fixed-dot printing.

3-Way Intelligent Heater enhances ink performance.

Three built-in heater areas – pre, print, and post – provide accurate media heating for controlled and consistent ink adhesion and drying.



INK VERSATILITY

Eco-solvent ink set includes expanded color choices.

The SS21 eco-solvent ink set now includes Light Magenta, Light Cyan and Light Black for deeper dimensional monochromatic and grayscale imaging. The addition of Orange ink widens the color gamut for better accuracy in the color reproduction of food and solid PANTONE® colors.






Ink set plus Light Bla

Also available are Mimaki ES3 eco-solvent inks that offer exceptional scratch resistance for high traffic applications where over-lamination is not desired. These low-odor inks can be used in an office environment without requiring special ventilation.

Configure for eco-solvent or dye-sublimation printing.

JV150 Series printers can be configured for either eco-solvent printing



AUTOMATED QUALITY ASSURANCE

JV150 Series printers are equipped with Mimaki's Nozzle Check Unit any nozzle that experiences a drop out. So rather than stopping, the

Optional Bulk Ink System for reduced operational costs.

JV150 Series printers can be equipped with the space-saving MBIS3

(Mimaki Bulk Ink System 3) featuring economical, highcapacity 2L ink packs that enable longer, unattended production and reduced cost per print.



Raster Link

Intuitive and user-friendly operation



Simultaneous layer printing.

Simplified RIP operations.

The "Register as Favorite" feature saves regularly used RIP layouts and operations in a single window for guick retrieval.

Web software update function.

JV150 SERIES SPECIFICATIONS | INKS

I	item	Specifications	Item	Color	440ml Cartridge	2L Bulk Pack with Optional MBIS3
Print Head		On-demand piezo head	SS21	Cyan	SPC-0501C	SPC-0588C
Print Speed (360x360, 1pass, Bi Hi)		4-color x2: 605 sqft/hr; 8-color (CMYK, Lm, Lc, Lk, Or): 302 sqft/hr	Eco-solvent	Magenta	SPC-0501M	SPC-0588M
Print Resolution		360, 540, 720, 1440 dpi		Yellow	SPC-0501Y	SPC-0588Y
Ink	Туре	Eco-solvent: SS21 (C, M, Y, K, Lc, Lm, Lk, Or)		Black	SPC-0501K	SPC-0588K
		Eco-solvent: ES3 (C, M, Y, K, W, Lc, Lm)		Light Cyan	SPC-0501LC	SPC-0588LC
		Solvent: *BS3 (C, M, Y, K)	ES3 Eco-solvent	Light Magenta	SPC-0501LM	SPC-0588LM
		Water-based sublimation: Sb53 (Bl, M, Y, DK, W, Lbl, Lm)		Light Black	SPC-0501LK	SPC-0588LK
		Sublimation: Sb54 (Bl, M, Y, K, W, Lbl, Lm)		Orange	SPC-05010r	SPC-05880r
-	Ink Supply System	SS21: 440 ml cartridge (std); 2 L bulk pack (opt); W - 220 ml cartridge		Cyan	SPC-0440C	—
		ES3: 440 mi cartridge (Stu), 2 L blik pack (opt), w - 220 mi cartridge		Magenta	SPC-0440M	—
		*BS3: 2 L bulk pack; 600 ml eco-cartridge		Yellow	SPC-0440Y	—
				Black	SPC-0440K	_
		Sb53: 440 ml cartridge (std); 2 L bulk pack (opt)		Light Cyan	SPC-0440LC	_
		Sb54: 440 ml cartridge (std); 2 L bulk pack (opt)		Light Magenta	SPC-0440LM	—
Maximum Print Width		JV150-130: 53.5 in (1,361 mm) JV150-160: 63.3 in (1,610 mm)	BS3*	Cyan	SPC-0693C	SPC-0667C (600 ml)‡
	Maximum Width	JV150-130: 53.9 in (1,371 mm) JV150-160: 63.7 in (1,620 mm)	Solvent	Magenta	SPC-0693M	SPC-0667M (600 ml)‡
Media	Maximum Thickness	1.0 mm or less		Yellow	SPC-0693Y	SPC-0667Y (600 ml)‡
	Roll Weight	88 lb (40 kg) or less		Black	SPC-0693K	SPC-0667K (600 ml)‡
Certifications		VCCI class A, FCC class A, ETL UL 60950 CE Marking (EMC, Low voltage, and Machinery directive) CB, RoHS REACH and EnergyStar, RCM		Eco-cartridge	OPT-J0237 #Required for 600 ml inks	
			Sb53 Water-based Sublimation	Blue	Sb53-BL-44	Sb53-BL-2L
				Magenta	Sb53-M-44	Sb53-M-2L
Interface		USB2.0		Yellow	Sb53-Y-44	Sb53-Y-2L
Input Power Supply		Single-phase (AC 100-120V / AC 220-240V) x2		Deep Black	Sb53-K-44	Sb53-K-2L
Power Consumption		1440W x1 or less (100V) / 1920W x1 or less (200V)		Light Blue	Sb53-LBL-44	Sb53-LBL-2L
Operational Environment		Temperature: 59°F - 86°F		Light Magenta	Sb53-LM-44	Sb53-LM-2L
		Humidity: 35% - 65% Rh (non-condensing)	Sb54	Blue	Sb54-BLT-44	Sb54-BLT-2L
Dimensions (W×D×H)		JV150-130: 98" x 28" x 57"	Sublimation	Magenta	Sb54-MT-44	Sb54-MT-2L
		JV150-160: 108" x 28" x 57"		Yellow	Sb54-YT-44	Sb54-YT-2L
				Black	Sb54-KT-44	Sb54-KT-2L
weight		JV150-130: 353 lb JV150-160: 408 lb		Light Blue	Sb54-LBT-44	Sb54-LBT-2L
omo of the	samples in this brochur	e are artificial renderings. Specifications, design and dimensions		Light Magenta	Sb54-LMT-44	Sb54-LMT-2L

stated may be subject to change without notice (for technical improvements, etc.

The corporate names and merchandise names written in this brochure are the trademarks or registered trademarks of their respective companies

s, so colors may vary slightly after replacement of the printing heads. Also note that if using multiple printer units, colors could vary slightly from one unit to another due to slight individual differences.



© 2015 Mimaki USA, Inc. All rights reserved. Ver. 1.2

for most sign and graphics applications or for dye-sublimation printing for textile and apparel transfer sublimation applications.

Real-time reliability.

(NCU) that automatically detects and cleans clogged nozzles while the machine is printing. The Nozzle Recovery System (NRS) takes over if, for any reason, the nozzle fails to clear and the printer experiences nozzle drop out. The NRS registers and substitutes for printing can continue without loss of quality.

SOPHISTICATED RIP SOFTWARE MAXIMIZES PERFORMANCE

RasterLink6 software enables simultaneous three-layer printing for two-sided viewing - color > white > color, or for white over/underprinting.

Program updates and profiles can be downloaded via the Mimaki website.

*BS3 Solvent ink is not available in the U.S. and Canada.

mimakiusa.com

Mimaki USA, Inc. | 150-A Satellite Blvd. Suwanee, GA 30024 | 888-530-4021 | info@mimakiusa.com





Mimaki JV150 Series Printer

Eco-solvent or dye-sublimation ink roll-to-roll printers available in 54" and 64" media widths






Exceeding expectations.

Paper, plastics or textiles – whatever the substrate, with the Mimaki JV150 Series printers, your business will thrive. These roll-based models include innovative technologies that deliver exceptional print quality, application versatility and lower operating costs. Meaning, you can add a JV150 to your current line-up as a stand-alone for short-run production or create lucrative custom jobs and produce everything in your current book of business at a higher quality and lower cost per print. And, with eight ink channels, an expanded color palette, and the ability to print to hundreds of substrates, you gain the application versatility to confidently take on new business.



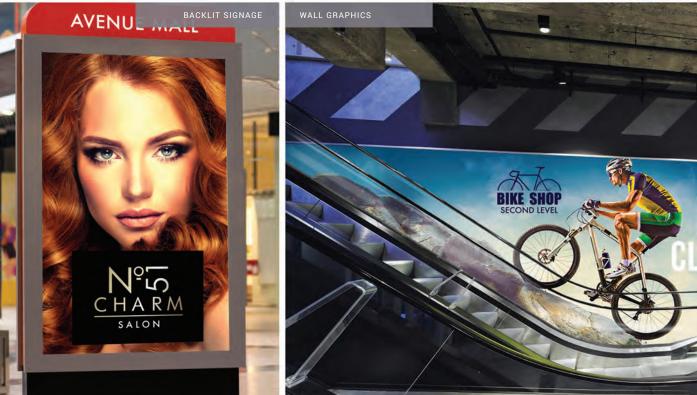



UNINTERRUPTED INK SUPPLY SYSTEM

When printing in CMYK, JV150 Series printers can be configured with two ink cartridges per color. Utilizing the Uninterrupted Ink Supply System (UISS) when one cartridge is emptied the printer automatically switches to the full cartridge to deliver continuous imaging.

Make a bold statement.

Mimaki JV150 Series printers go beyond versatility to deliver a remarkable range of applications. Gamut extending eco-solvent inks and variable drop technology enable you to accomplish anything from fine art reproduction to vehicle wraps and more. Or choose dye-sublimation inks to create vibrant textiles and soft signage. Using the Mimaki JV150 Series printer's superb quality, color fidelity and flexibility you'll go beyond the expected to deliver exactly what your customers need.



CONSOLIDATED CONTROLS JV150 Series printers are equipped with a newly designed, easy to navigate, LED control panel that puts all the printer's main functions and calibrations at your fingertips.

SMOOTH FEEDING PINCH ROLLER SYSTEM

Closely-positioned and independently adjustable pinch rollers ensure smooth, consistent media feeding for accurate imaging at any speed. From heavy canvas to lightweight paper, your media progresses smoothly without cockling or damage. MAPS3 BRINGS IMAGES TO LIFE

The unique imaging technology of the MAPS3 (Mimaki Advanced Pass System 3) practically eliminates banding at higher speeds by employing a proprietary dot randomized pattern throughout the pass modes.



E-MAIL PRINT STATUS NOTIFICATION

Ensure your designated staff are always in-the-know. For long running print jobs, the JV150 can send status messages such as job start, interruptions and job completion through the e-mail notification system.